

LL 37/65 P1

AIR NAILER FOR WOODEN NAILS

APPLICATION

Made to use wooden nails LignoLoc®

Ideal for carpenters and joiner.

Siding, wood flooring, coffin, wooden cases, laminated wood

Can be used in inner or outer construction.

TYPE OF NAILS

CLOU LIGNOLOC®



code **101F44AC**

TECHNICAL DESCRIPTION


. Code	101F44AC
. Trigger actuation	one by one / burst
. Dimensions L / W / H	275 / 130 / 322 mm
. Weight	2.40 Kg
. Loader capacity	300
. Nails length	50 - 65 mm
. Nails diameter	3.7 mm
. Operating pressure	5-8 bars

ADVANTAGES



- No pre-drilling
- No wood glue required thanks to wood welding
- Installed much more quicker than wooden dowels
- Made from indigenous beech wood
- Hardly any water absorption, so no expansion
- Better fire behaviour than metal fasteners
- No thermal bridges, so better insulation values
- No traces of corrosion or streaking in the wood
- Environmentally friendly
- Less tool wear
- Depth adjustment
- Directional deflector
- Delivered with siding-tip

HIGH RETENTION THANKS TO
LIGNIN WELDING

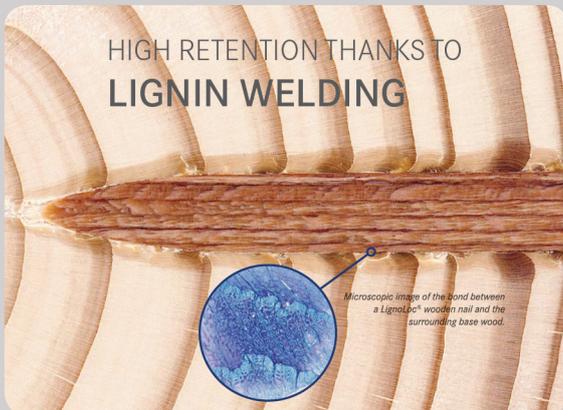

Microscopic image of the bond between
a LignoLoc® wooden nail and the
surrounding base wood.

CONTACT

ALSAFIX
CS 60023 - 114a rue Principale - F-67240 GRIES
Tel. : +33 3 88 72 42 41 - Fax : +33 3 88 72 17 15
alsafix@alsafix.com - www.alsafix.com

ALSAFIX
www.alsafix.com