ALSAFIX®

TECHNICAL SPECIFICATIONS

D90-B2

Cordless battery-powered nailer

Cordless battery-powered nailer for 34° nails, ideal for lathing, carpentry, and roofing work, as well as formwork and cladding.



L 323 l 125 H 345	4,30 kg	18 V 5,0 Ah Li-ion	✓	57	50 - 90 mm	2,8 - 3,1 mm	

D90-B2 | TECHNICAL DATA SHEET

Cordless battery-powered nailer

Code **12B3490B2**



Description

Cordless battery-powered nailer for 34° nails, ideal for lathing, carpentry, and roofing work, as well as formwork and cladding.

Dimensions (L/l/H) (mm)	339 / 177.5 / 359.3 mm
Weight (kg)	4,46 kg
Shot	Single shot
Magazine capacity	57 nails
Projectile type	34° nails
Projectile length (mm)	50 - 90 mm
Projectile diameter	2,8 - 3,1 mm
Rate of fire	Up to 2 shots/second
Maximum shots per charge	750 shots/charge
Battery type	Li-ion 18 V - 5,0 Ah
EAN code	3660601092490
Included	Case, 2 batteries, and 1 charger

Advantages

- Supplied in a case with 2 batteries and 1 charger
- Supplied with a natural polyamide (PA12) (nylon) protective tip : NEZD90B2
- Powerful 105 J brushless motor
- Drives up to 2 nails per second
- Depth adjustment via dial
- Anti-dry firing system
- No gas cartridge required
- Non-slip handle


Projectiles

34° nails

50 - 90 mm
Ø 2,8 - 3,1 mm

34°D nails

50 - 90 mm
Ø 2,8 - 3,1 mm

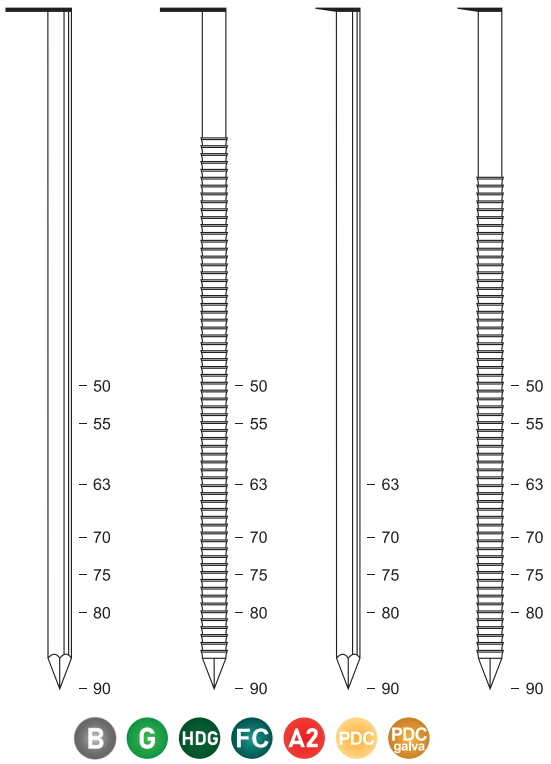

B G HDG FC A2 PDC PDC galva

Low noise and vibration

Noise characteristic values in accordance with the standard	**EN 12549+A1**
A-weighted sound pressure level at the workstation	**83,1 dB**
A-weighted sound power level	**94,1 dB**
C-weighted instantaneous peak sound pressure level at the workstation	**87,9 dB**
Vibration value according to EN ISO 28927-13	**4,68 m/s²**

Related products

Battery
18 V - **2.5 Ah**
code :
12BAT1825



Battery
18 V - **5.0 Ah**
code :
12BAT1850



Charger
18 V
code :
12CHRG18



Other version available

code : 12B3490X
Supplied without case, battery or charger

ALSAFIX reserves the right to modify certain technical characteristics. Information provided for informational purposes only.
Alsafix cannot be held liable in the event of implementation without prior calculations and tests specifc to each case. Presentation photos are not contractual.

114a rue Principale
FR 67240 GRIES
Tél. +33 3 88 72 19 31
alsafix@alsafix.com
www.alsafix.com