

 suprabeam®

 **ALSAFIX**  
www.alsafix.com

**T4γ**



**1000**  
**LUMENS**



Li-ion  
12.4 Wh



382 g



120°



IP65

SB4101001

# KEY FEATURES / UNIQUE SELLING POINTS (USP)



## WATER RESISTANT AND DUSTPROOF - IP65

Tested according to IP65 ensures water resistant and dustproof protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



## MAGNETIC

With 3 super strong built in magnets in the bottom and back of the I4r it can be fixed on any magnetic surface to use it as a fixed work light for hands free operation.



## 180° FOLDABLE LIGHT

With the 180° foldable head the I4r ensures a very flexible and versatile worklight for multiple situations.



## TOP LIGHT- 200LM

With the smart 200 Lumens top light the I4r can be used in all kinds of situations. With this extra light option the I4r is perfect for both area light and inspection.



## HIDDEN HOOKS


On the back of the I4r it has 2 hidden hooks which enables you to hang your worklight up high to provide you with a great area light.



## HEAVY DUTY IK09

The rugged design and IK09 rating of the I4r makes it durable in almost every situation. Take the I4r with you everywhere and it will be your trusty companion.

# LIGHT CURVE AND RUNTIMES

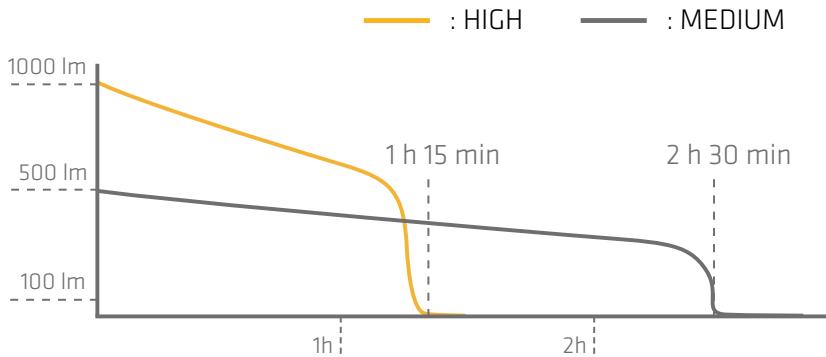

### HIGH

1000 LUMENS 1 h | 15 min

### MEDIUM

500 LUMENS 2 h | 30 min

### LOW

250 LUMENS 4 h | 15 min

### TOP LIGHT

200 LUMENS

# WHAT'S IN THE BOX

### WORKLIGHT



### ADAPTER



### USB-C CABLE



# PACKAGING



## PACKAGING

<b>Customs Tariff Number:</b>	8513 1000
<b>Packaging:</b>	Carton Box
<b>Single Box Content / Size / Weight:</b>	1 pcs, Height/Width/Depth, 27/10/8.5 cm / 550 g
<b>Master Box Content / Size / Weight:</b>	12 pcs, 36 x 31.5 x 29 cm / 7.2 kg
<b>Code:</b>	XXX
<b>CODE EAN:</b>	XXX

# SPECIFICATIONS

<b>LED / Focus Configuration:</b>	Main light: High quality 10W COB LED, 6,500K, Top Light: High quality 4W SMD LED, 6,500K
<b>Case Material / Surface Treatment:</b>	2K Plastic Durable Housing
<b>Case Color:</b>	Black / Light Grey
<b>Switch:</b>	TOP LIGHT, HIGH, MEDIUM, LOW
<b>Dimensions:</b>	H: 260mm, W: 53mm, D: 39.3
<b>Weight incl. Battery:</b>	382g
<b>Ingress Protection/Impact Protection Rating:</b>	Water Resistant and Dustproof IP65 / IK09
<b>Temperature (Operation):</b>	-10°C to +40°C

# ELECTRONICS

<b>Built in Controller:</b>	Yes, 4-step Controller by Press
<b>Standard Power Source:</b>	Li-ion 3.7V, 3350 mAh, 12.39 Wh
<b>Charging Time:</b>	4 hours 30 min
<b>Beam Type / Distance:</b>	180° Adjustable Head / Top Light: 75 m, Main Light: 40 m
<b>Luminous Flux:</b>	High: 1000lm, Medium: 500lm, Low: 250lm / Top Light: 200 lm
<b>Lighting Time:</b>	High: 1 h, Medium: 3h, Low: 11h
<b>Accessories Included:</b>	110V -240V AC/DC Charger / 5V 1A, USB-C Cable
<b>Charging Temperature:</b>	-0°C to +45°C

# DIMENSIONS



Distributed by:



ALSAFIX HEAD OFFICE  
114A rue Principale  
FR-67240 GRIES  
Tel: +33 3 88 72 19 31

[www.alsafix.com](http://www.alsafix.com)  
alsafix@alsafix.com

ALSAFIX PARIS  
34 avenue de Bobigny  
FR-93135 NOISY-LE-SEC  
Tel: +33 1 48 44 44 59

[www.alsafix.com](http://www.alsafix.com)  
paris@alsafix.com