

suprabeam®

ALSAFIX®
www.alsafix.com

T2γ



700
LUMENS



Li-ion
9.6 Wh



373 g




120°



IP54

SB4101002

KEY FEATURES / UNIQUE SELLING POINTS (USP)



WATER- AND DUST RESISTANT - IP54

Tested according to IP54 ensures water resistant and dust resistant protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



MAGNETIC

With the built in magnet in the bottom of the I2r it can be fixed on any magnetic surface to use it as a fixed work light for hands free operation.



180° FOLDABLE LIGHT

With the 180° foldable and 180° rotating head the I2r ensures a very flexible and versatile worklight for multiple situations.



DIMMING

The dimming switch offers simple and stepless power adjustment. Adjust the light from 60 to 700 lumens with a simple turn of the switch.



HIDDEN HOOK


At the bottom the I2r there is a hidden hook which enables you to hang your worklight up high to provide you with a great area light.



TOP LIGHT

The I2r has a powerful top light built in to the top of the foldable arm, making it even more versatile for use in any situation

LIGHT CURVE AND RUNTIMES

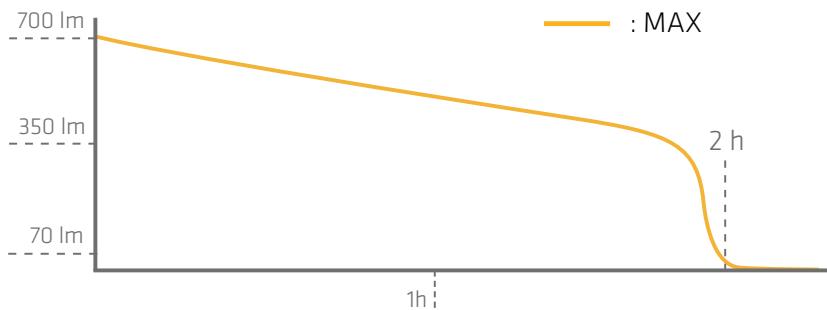

DIMMING

700 LUMENS	2-16 h
------------	--------

TOP LIGHT

120 LUMENS	10 h
------------	------

WHAT'S IN THE BOX

WORKLIGHT



ADAPTER



USB-C CABLE



PACKAGING



PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Carton Box
Single Box Content / Size / Weight:	1 pcs, Height/Width/Depth, 25/15/5.5 cm / 550 g
Master Box Content / Size / Weight:	12 pcs, 36 x 26.5 x 32 cm / 7.4 kg
Code:	SB4101002
CODE EAN:	5704049908031

SPECIFICATIONS

LED / Focus Configuration:	Worklight: Super Bright COB LED, 6,500K, Top Light: Super Bright SMD LED, 6,500K
Case Material / Surface Treatment:	Aluminium, 2K Plastic Durable Housing
Case Color:	Black / Light Grey
Switch:	Worklight: Stepless Dimming Wheel, Top light: Switch, ON/OFF
Dimensions:	H: 220 mm/400 mm, W: 46 mm, D: 66.5 mm
Weight incl. Battery:	373g
Ingress Protection/Impact Protection Rating:	Water- and Dust Resistant IP54 / IK07
Temperature (Operation):	-10°C to +40°C

ELECTRONICS

Built in Controller:	Yes, dimmable
Standard Power Source:	Li-ion 3.7V, 2600 mAh, 9.62 Wh
Charging Time:	3 hours 45 min
Beam Type:	180° rotating and flipping head with Top Light
Luminous Flux:	Dimming: 700-60 lm / Top Light: 120 lm
Lighting Time:	Dimming: 2-16 h / Top Light: 10 h
Accessories Included:	110V -240V AC/DC Charger / 5V 1A, USB-C Cable
Charging Temperature:	-0°C to +45°C

DIMENSIONS



Distributed by:



ALSAFIX HEAD OFFICE
114A rue Principale
FR-67240 GRIES
Tel: +33 3 88 72 19 31

www.alsafix.com
alsafix@alsafix.com

ALSAFIX PARIS
34 avenue de Bobigny
FR-93135 NOISY-LE-SEC
Tel: +33 1 48 44 44 59

www.alsafix.com
paris@alsafix.com