


 suprabeam®

ALSAFIX
www.alsafix.com

D2_r

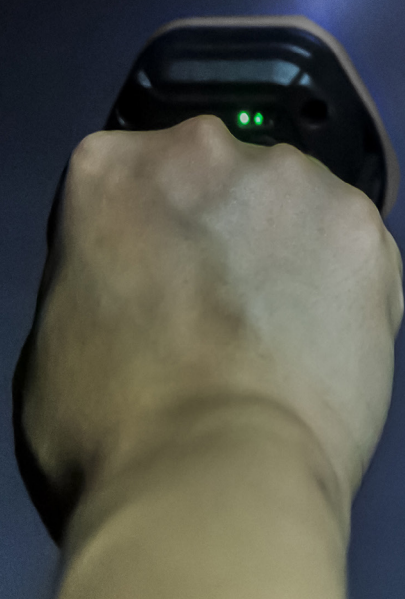

700
LUMENS



Li-ion
9.6 Wh



210 g




120°/20°



IP65

SB4101101

KEY FEATURES / UNIQUE SELLING POINTS (USP)



WATER RESISTANT AND DUSTPROOF - IP65

Tested according to IP65 ensures water resistant and dustproof protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



MAGNETIC

With the built in magnet in the handle of the D2r it can be fixed on any magnetic surface to use it as a fixed work light for hands free operation.



180° ADJUSTABLE LIGHT

The 180° flexible handle on the D2r ensures a very flexible and versatile worklight for multiple situations.



SPOT- AND FLOODLIGHT

The D2r has both a 20° spotlight and a 120° floodlight. Therefore it comes in handy for both inspection and for worklight.



HIGH CRI +80


The D2r has High CRI (+80) to bring out the true colors. With the High CRI the D2r provides the most natural colors to make the workday a lot easier.



3 LED BATTERY INDICATORS

The 3 LED battery level indicators will indicate how much power is left in the D2r and when it needs to be recharged.

LIGHT CURVE AND RUNTIMES

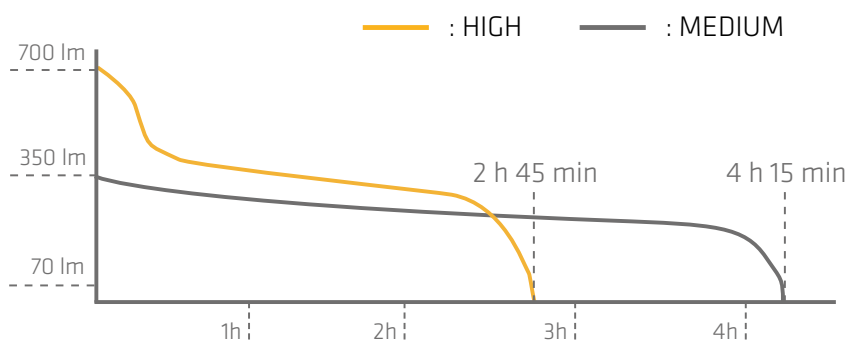

HIGH

700 LUMENS	2 h 45 min
------------	--------------

MEDIUM

350 LUMENS	4 h 15 min
------------	--------------

LOW

100 LUMENS	12 h
------------	------

SPOTLIGHT

250 LUMENS	4 h
------------	-----

WHAT'S IN THE BOX

WORKLIGHT



ADAPTER



USB-C CABLE



PACKAGING



PACKAGING

Customs Tariff Number:	9405 4099
Packaging:	Carton Box
Single Box Content / Size / Weight:	1 pcs, Height/Width/Depth, 21.5/11.6/4.8 cm / 350 g
Master Box Content / Size / Weight:	24 pcs, 46.5 x 31 x 25 cm / 8.7 kg
Code:	SB4101101
GENCOD:	5704049908048


SPECIFICATIONS

LED / Focus Configuration:	Floodlight: High Quality 7W COB LED, 6500K, SpotLight: High Quality 3W SMD LED, 6500K
Case Material / Surface Treatment:	2K Plastic Durable Housing
Case Color:	Black / Light Grey
Switch:	SPOTLIGHT, LOW, MEDIUM, HIGH
Dimensions:	H: 93.5mm, W: 80mm, D: 35.5
Weight incl. Battery:	210g
Ingress Protection/Impact Protection Rating:	Water Resistant and Dustproof IP65 / IK07
Temperature (Operation):	-10°C to +40°C

ELECTRONICS

Built in Controller:	Yes, 4-step Controller by Press
Standard Power Source:	Li-ion 3.7V, 2600 mAh, 9.62 Wh
Charging Time:	3 hours 15 min
Beam Type / Distance:	180° Adjustable Handle / Spotlight: 120 m, Floodlight: 35 m
Luminous Flux:	High: 700lm, Medium: 350lm, Low: 100lm / Spotlight: 250 lm
Lighting Time:	High: 2h 50 min, Medium: 4h 15 min, Low: 12h, Spotlight: 4h
Accessories Included:	110V -240V AC/DC Charger / 5V 1A, USB-C-Cable
Charging Temperature:	-0°C to +45°C

DIMENSIONS

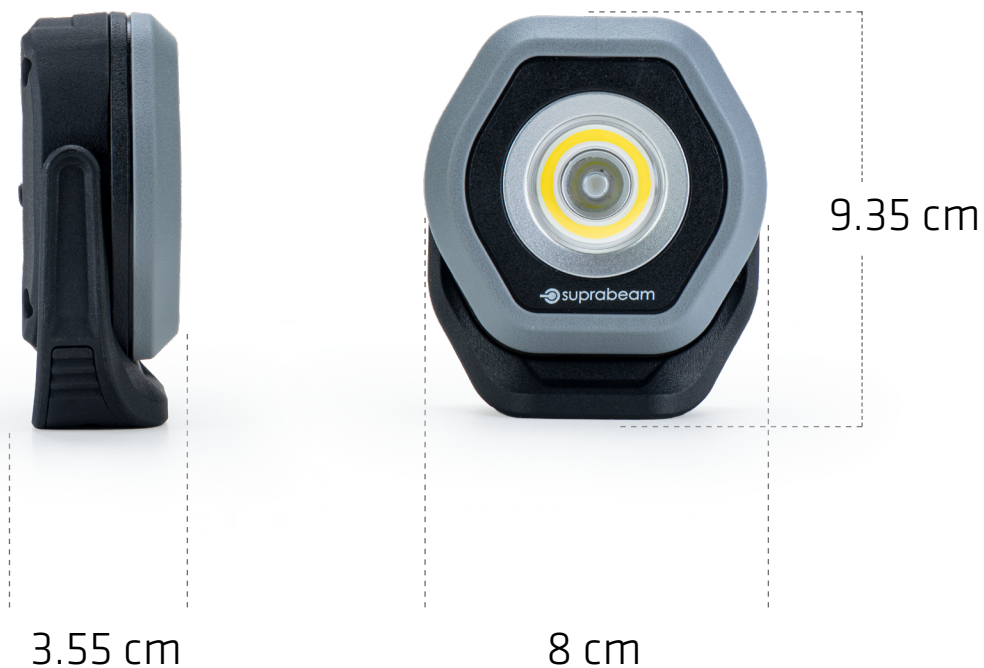

Distributed by:

ALSAFIX HEAD OFFICE
114A rue Principale
FR-67240 GRIES
Tel: +33 3 88 72 19 31

www.alsafix.com
alsafix@alsafix.com

ALSAFIX PARIS
34 avenue de Bobigny
FR-93135 NOISY-LE-SEC
Tel: +33 1 48 44 44 59

www.alsafix.com
paris@alsafix.com