

 suprabeam®

 **ALSAFIX**  
www.alsafix.com

**D4γ**



**1400**  
**LUMENS**



Li-ion  
19.2 Wh



400 g




120°/20°



IP65

SB4101102

# KEY FEATURES / UNIQUE SELLING POINTS (USP)



## WATER RESISTANT AND DUSTPROOF - IP65

Tested according to IP65 ensures water resistant and dustproof protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



## MAGNETIC

With the built in magnet in the handle of the D4r it can be fixed on any magnetic surface to use it as a fixed work light for hands free operation.




## 180° ADJUSTABLE LIGHT

The 180° flexible handle on the D4r ensures a very flexible and versatile worklight for multiple situations.



## SPOT- AND FLOODLIGHT

The D4r has both a 20° spotlight and a 120° floodlight. Therefor it comes in handy for both inspection and for worklight.



## HIGH CRI +80


The D4r has High CRI (+80) to bring out the true colors. With the High CRI the D4r provides the most natural colors to make the workday a lot easier.



## 3 LED BATTERY INDICATORS

The 3 LED battery level indicators will indicate how much power is left in the D4r and when it needs to be recharged.

# LIGHT CURVE AND RUNTIMES

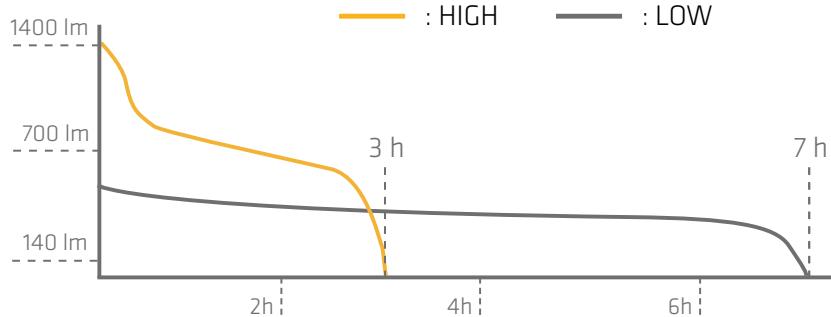

### HIGH

1400 LUMENS	3 h
-------------	-----

### MEDIUM

900 LUMENS	4 h   15 min
------------	--------------

### LOW

450 LUMENS	7 h
------------	-----

### SPOTLIGHT

400 LUMENS	6 h   30 min
------------	--------------

# WHAT'S IN THE BOX

WORKLIGHT



ADAPTER



USB-C CABLE



# PACKAGING



## PACKAGING

<b>Customs Tariff Number:</b>	9405 4099
<b>Packaging:</b>	Carton Box
<b>Single Box Content / Size / Weight:</b>	1 pcs, Height/Width/Depth, 23.2/12.7/5 cm / 600 g
<b>Master Box Content / Size / Weight:</b>	12 pcs, 32 x 25 x 27.5 cm / 7.5 kg
<b>Code:</b>	SB4101102
<b>GENCOD :</b>	5704049908055

# SPECIFICATIONS

<b>LED / Focus Configuration:</b>	Floodlight: High quality 15W COB LED, 6500K, SpotLight: High quality 5W SMD LED, 6500K
<b>Case Material / Surface Treatment:</b>	2K Plastic durable housing
<b>Case Color:</b>	Black / Light Grey
<b>Switch:</b>	SPOTLIGHT, LOW, MEDIUM, HIGH
<b>Dimensions:</b>	H: 116mm, W: 101mm, D: 41.5
<b>Weight incl. Battery:</b>	400g
<b>Ingress Protection/Impact Protection Rating:</b>	Water- and Dustproof IP65 / IK07
<b>Temperature (Operation):</b>	-10°C to +40°C

# ELECTRONICS

<b>Built in Controller:</b>	Yes, 4-step Controller by Press
<b>Standard Power Source:</b>	Li-ion 3.7V, 5200 mAh, 19.24 Wh
<b>Charging Time:</b>	4 hours 30 min
<b>Beam Type / Distance:</b>	180° Adjustable Handle / Spotlight: 125 m, Floodlight: 45 m
<b>Luminous Flux:</b>	High: 1400lm, Medium: 900lm, Low: 450lm / Spotlight: 400 lm
<b>Lighting Time:</b>	High: 3h, Medium: 4h 15 min, Low: 7h, Spotlight: 6h 30 min
<b>Accessories Included:</b>	110V -240V AC/DC Charger / 5V 2A, USB-C-Cable
<b>Charging Temperature:</b>	-0°C to +45°C

# DIMENSIONS



Distributed by:



ALSAFIX HEAD OFFICE  
114A rue Principale  
FR-67240 GRIES  
Tel: +33 3 88 72 19 31

[www.alsafix.com](http://www.alsafix.com)  
alsafix@alsafix.com

ALSAFIX PARIS  
34 avenue de Bobigny  
FR-93135 NOISY-LE-SEC  
Tel: +33 1 48 44 44 59

[www.alsafix.com](http://www.alsafix.com)  
paris@alsafix.com