 suprabeam®

 **ALSAFIX**  
www.alsafix.com

w6γ



**4600**  
**LUMENS**



Li-ion  
77 Wh



2140 g




2x110°



IP54

SB4101301

# KEY FEATURES / UNIQUE SELLING POINTS (USP)



## WATER- AND DUST RESISTANT - IP54

Tested according to IP54 ensures water resistant and dust resistant protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



## 180° ROTATING LIGHT

The W6r has two lightpanels, which can be rotated 180° individually. This means the W6r will be able to deliver light in two different directions at the same time.




## 90° ADJUSTABLE HANDLE

The 90° flexible handle on the W6r ensures a very flexible and versatile worklight for multiple situations.




## EXTERNAL BATTERY

The externally charged 5200 mAh Li-ion battery can be charged, while using a spare battery in the W6r. Spare battery is sold separately (SB4109001)



## HIGH CRI +80


The W6r has High CRI (+80) to bring out the true colors. With the High CRI the W6r provides the most natural colors to make the workday a lot easier.



## POWER BANK FUNCTION

The battery for the W6r can be used as a power bank. The battery inside the W6r has a USB 5V/2A Output on the back for charging a mobile phone.

# LIGHT CURVE AND RUNTIMES

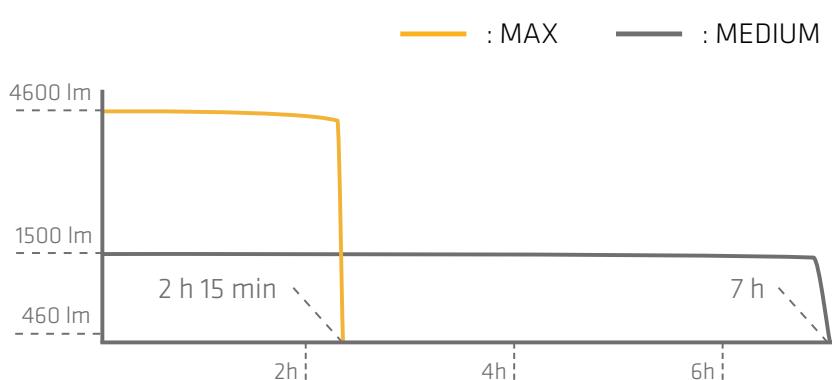

## MAX

4600 LUMENS | 2 h | 15 min

## HIGH

3000 LUMENS | 3 h | 30 min

## MEDIUM

1500 LUMENS | 7 h

## LOW

750 LUMENS | 14 h

# WHAT'S IN THE BOX

## WORKLIGHT



## ADAPTER



## BATTERY



# PACKAGING



## PACKAGING

<b>Customs Tariff Number:</b>	9405 4099
<b>Packaging:</b>	Carton Box
<b>Single Box Content / Size / Weight:</b>	1 pcs, Height/Width/Depth, 31.8/18.2/16 cm / 2660 g
<b>Master Box Content / Size / Weight:</b>	4 pcs, 38 x 33.5 x 33.5 cm / 11.2 kg
<b>Code:</b>	SB4101301
<b>CODE EAN:</b>	5704049908086

# SPECIFICATIONS

<b>LED / Focus Configuration:</b>	120pcsx SMD LEDs, 5700K
<b>Case Material / Surface Treatment:</b>	2K Plastic Soft/Hard
<b>Case Color:</b>	Black / Light Grey
<b>Switch:</b>	MAX, HIGH, MEDIUM, LOW
<b>Dimensions:</b>	H: 288mm, W: 176mm, D: 131mm
<b>Weight incl. Battery:</b>	2410g
<b>Ingress Protection/Impact Protection Rating:</b>	Water Resistant and Dustproof IP54 / IK07
<b>Temperature (Operation):</b>	-10°C to +40°C

# ELECTRONICS

<b>Built in Controller:</b>	Yes, 4-step Controller by Press
<b>Standard Power Source:</b>	Li-ion 14.8V, 5200 mAh, 76.96 Wh
<b>Charging Time:</b>	5 hours
<b>Beam Type / Distance:</b>	90° Adjustable Handle, 2x180° Adjustable Floodlight / 80 m
<b>Luminous Flux:</b>	Max: 4600lm, High: 3000lm, Medium: 1500lm, Low: 750lm
<b>Lighting Time:</b>	Max: 2h 15 min, High: 3h 30 min, Medium: 7h, Low: 14h
<b>Accessories Included:</b>	110V -240V AC/DC Charger / 20V 1.1A
<b>Charging Temperature:</b>	-0°C to +45°C

# ACCESSORIES

PRODUCT	DESCRIPTION	CODE	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Tripod for single lamp mount	SB4109003	2.6 kg	L: 77 cm, W: 16 cm, H: 16 cm	5704049908116
	Spare battery with USB 5V/2A out.(5200mAh / 14.8V incl. internal charging!)	SB4109001	554 g	H: 11.6 cm, W: 8.5 cm, D: 7 cm	5704049908093

## DIMENSIONS



13.1 cm



17.6 cm

28.8 cm

Distributed by:



ALSAFIX HEAD OFFICE  
114A rue Principale  
FR-67240 GRIES  
Tel: +33 3 88 72 19 31

ALSAFIX PARIS  
34 avenue de Bobigny  
FR-93135 NOISY-LE-SEC  
Tel: +33 1 48 44 44 59

[www.alsafix.com](http://www.alsafix.com)  
alsafix@alsafix.com

[www.alsafix.com](http://www.alsafix.com)  
paris@alsafix.com