



 suprabeam®


Q3

ALSAFIX
www.alsafix.com®

NiMH Compatible

Dimming with
Intelligent Electronic Switch

Versatile use with
Sliding Hyperfocus™

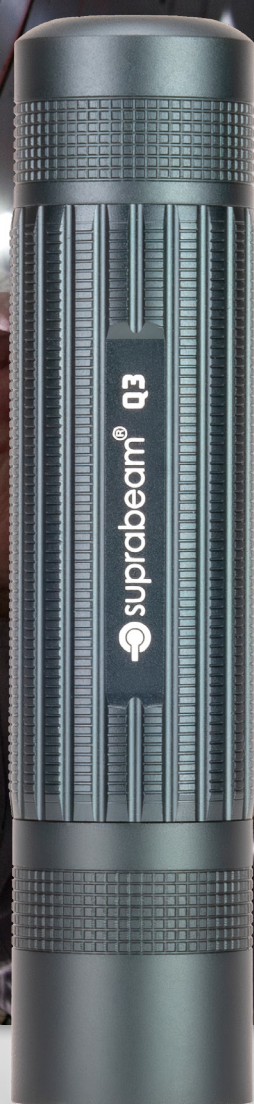

380
LUMENS



3 x AAA



230 m



99 g



10° - 70°

SB5031111

PACKAGING



Customs Tariff Number:	8513 1000
Packaging:	Recyclable Cardboard Packaging
Single Box Content / Size / Weight:	1 pcs, height/width/depth: 17.5 x 12 x 3 cm / 215 g
Master Box Content / Size / Weight:	18 pcs, height/width/depth: 20.2 x 19.5 x 37.5 cm / 4.1 kg
Code:	SB5031111
CODE EAN:	5704049908253

SPECIFICATIONS

LED / Focus Configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Prime Aluminium quality 6061, anodized
Case Color:	Anthracite Dark Grey
Switch at Rear:	Electronic Switch with Solid Silicone Button
Dimensions:	L: 113.5 mm, ø: 26.5 mm
Weight incl. Battery:	99 g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature (Operation):	-20°C to +50°C

ELECTRONICS

Built in Controller:	Yes, dimmable
Standard Power Source:	3 x AAA Alkaline
Compatible with rechargeable cells:	Yes, with AAA NiMH 1.2V
Beam / Distance:	Variable from Spot to Floodlight / 230 Meters
Luminous Flux:	Max: 380 lm / Dim: 380-10 lm
Lighting Time:	Max: 2 h 15 min / Low dim: 75 h
Accessories Included:	Pouch with Nylon Fastener and Press Stud, Strap
Charging Temperature:	-0°C to +45°C

Distributed by:



ALSAFIX HEAD OFFICE
114A rue Principale
FR-67240 GRIES
Tel: +33 3 88 72 19 31

www.alsafix.com
alsafix@alsafix.com

ALSAFIX PARIS
34 avenue de Bobigny
FR-93135 NOISY-LE-SEC
Tel: +33 1 48 44 44 59

www.alsafix.com
paris@alsafix.com