

suprabeam®

ALSAFIX®
www.alsafix.com

S2



300
LUMENS



3 x AAA



85 m




116 g



20° / 60°

SB6021011

KEY FEATURES / UNIQUE SELLING POINTS (USP)



WATER- AND DUSTPROOF - IP68

Tested according to IP68 ensures water proof (2m) and dustproof protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



USB CHARGING IN BATTERY

An accessory for S2 is the Li-Po battery specially built with integrated USB-charging. It offers demanding users the benefit of a rechargeable battery to power their headlamp. Truly for Professionals!



SOFT FOAM PAD

The soft foam pad on the back of the lamp head gives you extra comfort on the forehead. You no longer have to worry about a sore forehead, when wearing the headlamp for longer periods of time.



DUAL OPTICS


The S2 has two different optical lenses. One lens creating a wide flood light, providing an even distributed light covering a large area. The second optical lens is a mixed beam lens providing a 20 degree spot with a 60 degree stray light.



DUAL ENERGY

Suprabeam S2 is designed to run with the new Suprabeam DUAL ENERGY concept, which allows you to use the headlamp with 3xAAA alkaline batteries or the Suprabeam 1400 mAh Li-Po battery with built-in charger.

LIGHT CURVE AND RUNTIMES

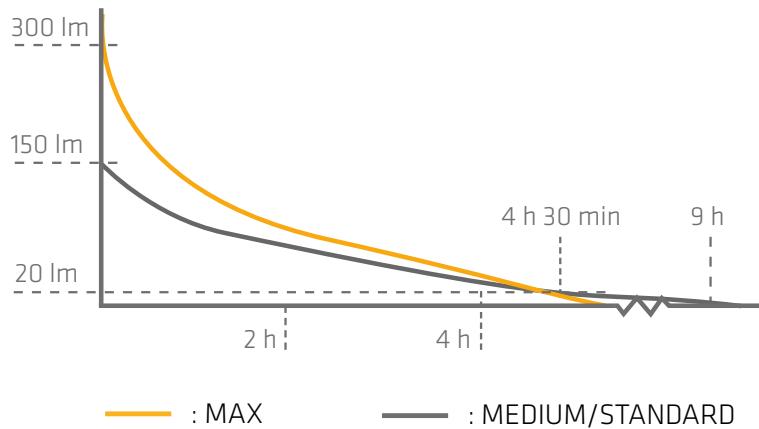

MAX

300 LUMENS

4 h | 30 min

MEDIUM

150 LUMENS

9 h

LOW

20 LUMENS

40 h

WHAT'S IN THE BOX

HEADLAMP



BATTERY



MANUAL



PACKAGING



PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Carton box packaging
Single Box Content / Size / Weight:	1 pcs, height/width/dept 12,5 x 6 x 5,5 cm / 150 g
Master Box Content / Size / Weight:	30 pcs, 32 x 26,5 x 18,8 cm / 5 kg
Code:	SB6021011
CODE EAN:	5704049908338

SPECIFICATIONS

LED / Focus Configuration:	2 CREE Power Chips
Case Material / Surface Treatment:	Hi-Tech Plastic Compound
Case Color:	Black / Transparent Grey
Switch:	2 Silicone Switches: Spot and Flood light and Transport lock
Headband:	With silicone stripes, Fits to 50-70 centimeters
Weight incl. Battery:	116 g
Ingress Protection Rating:	Waterproof (2m) and Dust proof IP68
Temperature (Operation):	-20°C to +50°C

ELECTRONICS


Built in Controller:	Yes, 3-step controller by press
Standard Power Source:	3 x AAA Alkaline
Beam / Distance:	Fixed Beam Flood and Spot / 85 Meters
Luminous Flux:	Max: 300 lm / Medium: 150 lm / Low: 20 lm
Lighting Time:	Max: 4 h 30 min / Medium: 9 h / Low: 40 h
Accessories Included:	Removable Washable Headband

ACCESSORIES

PRODUCT	DESCRIPTION	CODE	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Battery: Li-Polymer cell 113545 with USB (1'400 mAh)	SB951026	36 g	L: 17.0 cm, W: 11.0 cm, H: 5 cm	5704049911321
	Replacement foam pads X 3	SB950083	10 g	L: 17.0 cm, W: 11.0 cm, H: 4 cm	5704049907287
	Helmet clip mount for S-Series	SB950076	22 g	L: 17.0 cm, W: 11.0 cm, H: 1 cm	5704049905672
	Adhesive holder with clip slot	SB950082	14 g	L: 17.0 cm, W: 11 cm, H: 0.5 cm	5704049907270
	Adhesive holder and helmet clip mount set	SB950084	34 g	L: 17.0 cm, W: 11 cm, H: 1 cm	5704049907294

SPAREPARTS

PRODUCT	DESCRIPTION	CODE	EAN CODE
	Lid for battery case S-series	995.0140	5704049907935

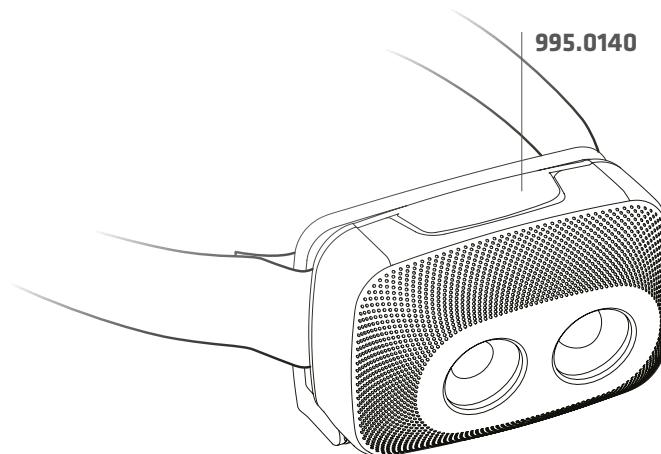

Distributed by:



ALSAFIX HEAD OFFICE
114A rue Principale
FR-67240 GRIES
Tel: +33 3 88 72 19 31

ALSAFIX PARIS
34 avenue de Bobigny
FR-93135 NOISY-LE-SEC
Tel: +33 1 48 44 44 59

www.alsafix.com
alsafix@alsafix.com

www.alsafix.com
paris@alsafix.com